

## MODEL H SERIES




### MODEL H

#### SIDE VIEW



#### TOP VIEW

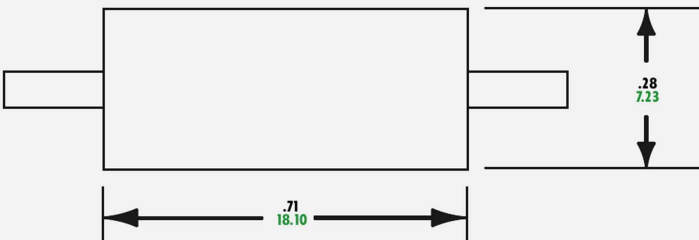

METRIC DIMENSIONS ARE IN MM (SHOWN IN GREEN)

Copyright 2006, Portage Electric Products, Incorporated, all right reserved

A Snap Action Thermal Protector specifically designed for DC voltage applications. This miniature device operates as a high limit single operation (non-resettable) type control. It is constructed with a phenolic resin case which isolates it from the electrical circuit.

### FEATURES

- Snap action device; quick make/quick break switching action.
- Single operation type device. The reset temperature is less than  $-35^{\circ}\text{C}$ . This prevents the thermostat from resetting under normal operating conditions.
- Unique construction provides for fast thermal response.
- Phenolic resin case isolates the device from the electrical circuit and is suitable for use in high temperature applications.
- Can be mounted directly on a heated surface.
- Preset calibration temperature, not adjustable in the field.
- Opposite end termination allows for flexibility of installation.
- Factory Installed lead wires or terminals available -Consult Factory.

### CONTACT RATINGS

- 4 amps/36V DC (resistive)
- CUL, TUV, VDE

### CALIBRATION TEMPERATURE RANGE

- Available with nominal calibration temperatures from  $50^{\circ}\text{C}$  to  $220^{\circ}\text{C}$ .

*We come through when the heat is on<sup>®</sup>*



Pepi<sup>®</sup>

Portage Electric Products, Inc.